



PTH

PRESSURE TRANSDUCER

SERIES 20

p max 40 - 100 - 250 - 400 bar

DESCRIPTION

This series of pressure transducers has been designed in order to be used for the main industrial applications and on moving machines.

The main feature of this transducer is to ensure its functioning also in bad working conditions, especially for what concerns the fluid temperature range which can go from a minimum of - 40 °C up to a maximum of + 120 °C

The functioning of this transducer is based on the strain-gauge principle, which is powered by an electric circuit developed according to the SMT technology which ensures a high reliability and maximum resistance to vibrations and mechanical stress.

Every component which is in contact with the fluid is made of stainless steel and the transducer is completely fluidproof.

The protection class of the electrical connection is IP65 for the version with DIN connector, while the version with the M12 connector has a protection class IP67.


They are available with current output signal 4 ÷ 20 mA or with voltage output signal 0 ÷ 10 V and they have the reverse polarity protection.

These transducers are available in 4 different pressure ranges, from 40 to 400 bar.

TECHNICAL CHARACTERISTICS (see paragraph 3)

| | | | |
|---------------------------|---------|----------------------|--------|
| Nominal pressure P_N | bar | 40 - 100 - 250 - 400 | |
| High dynamic pressure | % P_N | 75 | |
| Maximum pressure | % P_N | 200 | |
| Class of precision | % P_N | 0,5 | |
| Output signal | voltage | V | 0 ÷ 10 |
| | current | mA | 4 ÷ 20 |
| Working temperature range | °C | -40 / +120 | |

HYDRAULIC SYMBOLS

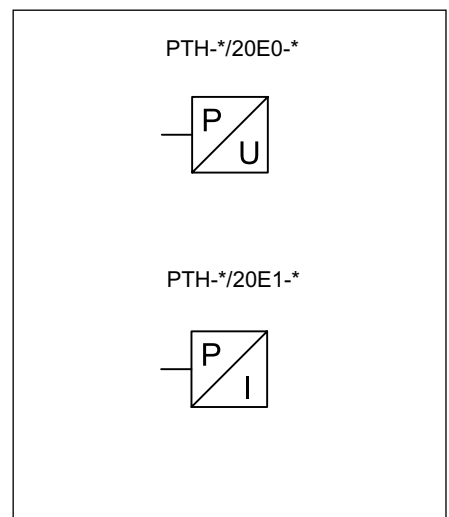

1 - IDENTIFICATION CODE

| | | | |
|---|---|--|--|
| | <div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> PTH- /20E- </div> | | |
| Pressure transducer | | | Electrical connection K10 = Reduced electrical connector DIN 43650 (standard) K12 = electrical connector M12 (on request) |
| High dynamic performance | | | |
| Nominal pressure | | | Output signal 0 = 0 + 10 V 1 = 4 + 20 mA (standard) (Other types of output signal are available on request) |
| 040 = 40 bar 250 = 250 bar 100 = 100 bar 400 = 400 bar (other pressure values are available upon request) | | | |
| Series no.: (the overall and mounting dimensions remain unchanged from 20 to 29)) | | | Integrated electronics with analogic output |

NOTE: the standard hydraulic connection is with threaded port of G 1/4 DIN 3852 and integrated seal. Other types of connection are available upon request.

2 - OVERALL AND MOUNTING DIMENSIONS

PTH-*/20E*-K10

PTH-*/20E*-K12

dimensions in mm

| | |
|---|---|
| 1 | Integrated plain seal in viton |
| 2 | Hexagonal: spanner 27 Tightening torque 25 Nm max |
| 3 | Reduced electrical connector DIN 43650 delivered with the transducer |

| | |
|---|--|
| 1 | Integrated plain seal in viton |
| 2 | Hexagonal: spanner 27 Tightening torque 25 Nm max |
| 3 | Connector M12x1 not included in the supply |

3 - TECHNICAL CHARACTERISTICS

| | | | | | |
|------------------------|---------|-----------|------------|------------|------------|
| Nominal pressure P_N | bar | 40 | 100 | 250 | 400 |
| Maximum pressure | $x P_N$ | x 2 | x 2 | x 2 | x 2 |
| Cracking pressure | $x P_N$ | x 6 | x 5 | x 4 | x 3,5 |

| | | E0 | E1 |
|--|--------------------|----------------|----------------|
| | | Output signal | $0 \div 10$ V |
| Max current consumption | mA | ≤ 12 | 23 |
| Supply voltage | DC V | $12 \div 30$ | $10 \div 28$ |
| Load resistance | K Ω | 2,5 | see parag. 4.2 |
| Response time | ms | < 1 | |
| Class of precision | % P_N | 0,5 | |
| Hysteresis | % P_N | $\pm 0,2$ | |
| Repeatability | % P_N | $\pm 0,05$ | |
| Linearity | % P_N | $\pm 0,2$ | |
| Stability after 1 million cycles | % P_N | $\pm 0,1$ | |
| Working temperature range | $^{\circ}\text{C}$ | $- 40 / + 120$ | |
| Thermal drift from 0 to + 100 $^{\circ}\text{C}$ | % P_N | ± 1 | |

| | | |
|---------------------------------|--|----------------------------------|
| In compliance with EC standards | Emission 61000-6-3 | Immunity 61000-6-2 |
| Vibration resistance | > 20 G | |
| Pressure connection | G 1/4" with integrated seal | |
| Electrical connection | 3 poles + earth DIN 43650 reduced connector for K10 connection | |
| | M12x1 4 pin straight connector for K12 connection (upon request) | |
| Protection class (EN 60529) | IP 65 for K10 connection | IP 67 for K12 connection |
| Ambient temperature range | $- 20 / + 80$ for K10 connection | $- 25 / + 85$ for K12 connection |
| Body material | AISI 304 | |
| Mass | 0,1 Kg | |


4 - TRANSDUCER VOLTAGE

4.1 - PTH-*/20E0-*

These transducers have been equipped with voltage stabilizer which supplies the electric circuit with constant voltage, independently from power supply voltage. We recommend a stabilized power supply voltage of 24 Vcc.

4.2 - PTH-*/20E1-*

We report the functioning diagram of the transducer. The VTA area represents the functioning zone of the transducer related to the chosen load resistance R_L . We recommend a power supply voltage of 24 Vcc and a load resistance of 700 Ohm.

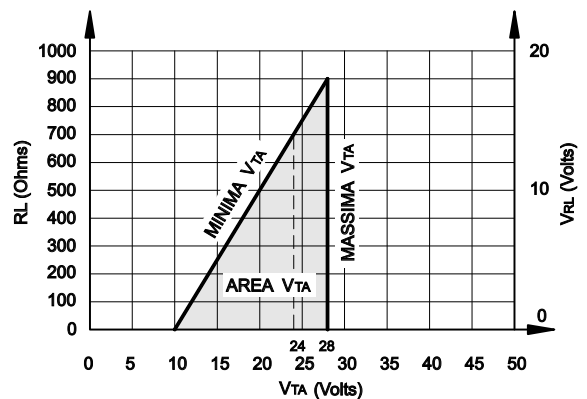

N.B. Outside the VTA area the correct functioning of the transducer is not assured.

5 - WIRING DIAGRAMS

