

# PZE3J


**PROPORTIONAL PRESSURE  
REDUCING VALVE, 3-WAY,  
PILOT OPERATED, WITH  
PRESSURE CLOSED LOOP  
AND INTEGRATED ELECTRONICS**

**SUBPLATE MOUNTING  
ISO 4401-03**


**SERIES 31**

**p max 350 bar  
Q max 40 l/min**

### MOUNTING SURFACE

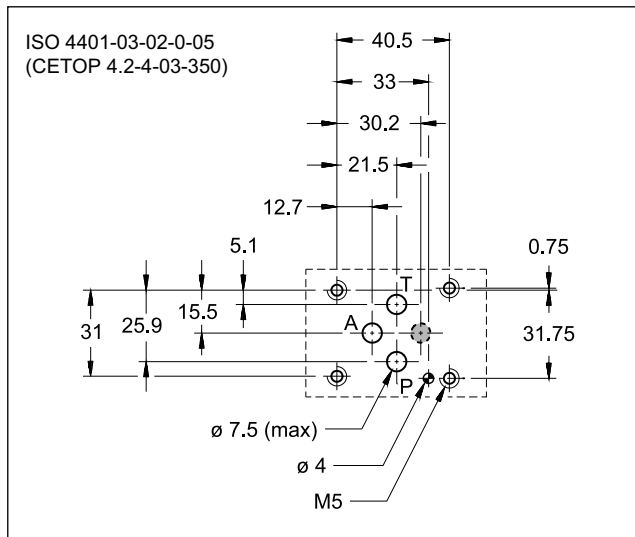

### OPERATING PRINCIPLE

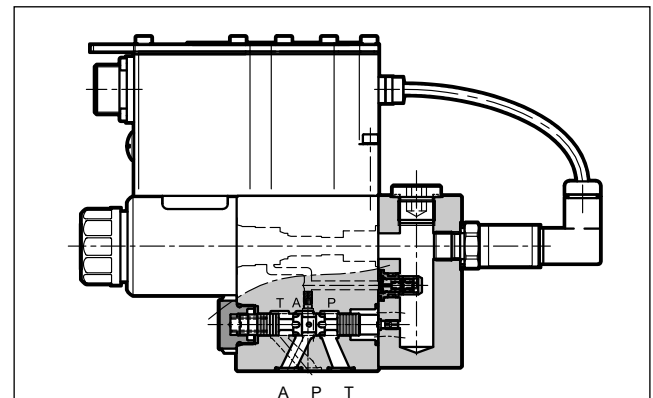


- PZE3J valve is a proportional 3-way pressure reducing valve, pilot operated, with pressure feedback, on-board electronics and mounting surface according to ISO 4401-03 standards.
- This valve controls the outlet pressure on port A, reducing the inlet pressure from line P or relieving the overpressure from line A into T keeping it at the set value. (typically: hydraulic counter-weight or load balancing)
- The valve is available with command signal in voltage or current and on board electronics with internal enable, external enable or 0V monitor on pin C.
- The monitoring of the value detected by the pressure transmitter is available on pin F.
- Valves are easy to install. The driver directly manages digital settings.

### PERFORMANCES

(obtained with mineral oil with viscosity of 36 cSt at 50°C and p = 140 bar)


Maximum operating pressure: - P port - T port	bar	350 2
Maximum flow (see p max = f(Q) diagram)	l/min	40
Step response	see paragraph 6	
Hysteresis	% of p nom	< 1 %
Repeatability	% of p nom	< ± 0.5%
Electrical characteristic	see paragraph 2	
Ambient temperature range	°C	-20 / +60
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 + 400
Fluid contamination degree	According to ISO 4406:1999 class 18/16/13	
Recommended viscosity	cSt	25
Mass	kg	3

### HYDRAULIC SYMBOL

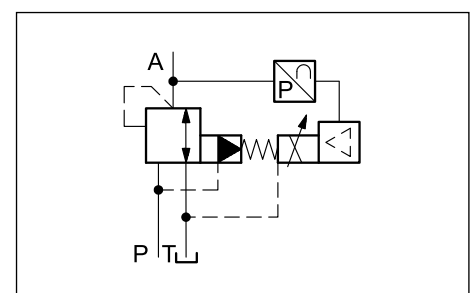



## 1 - IDENTIFICATION CODE

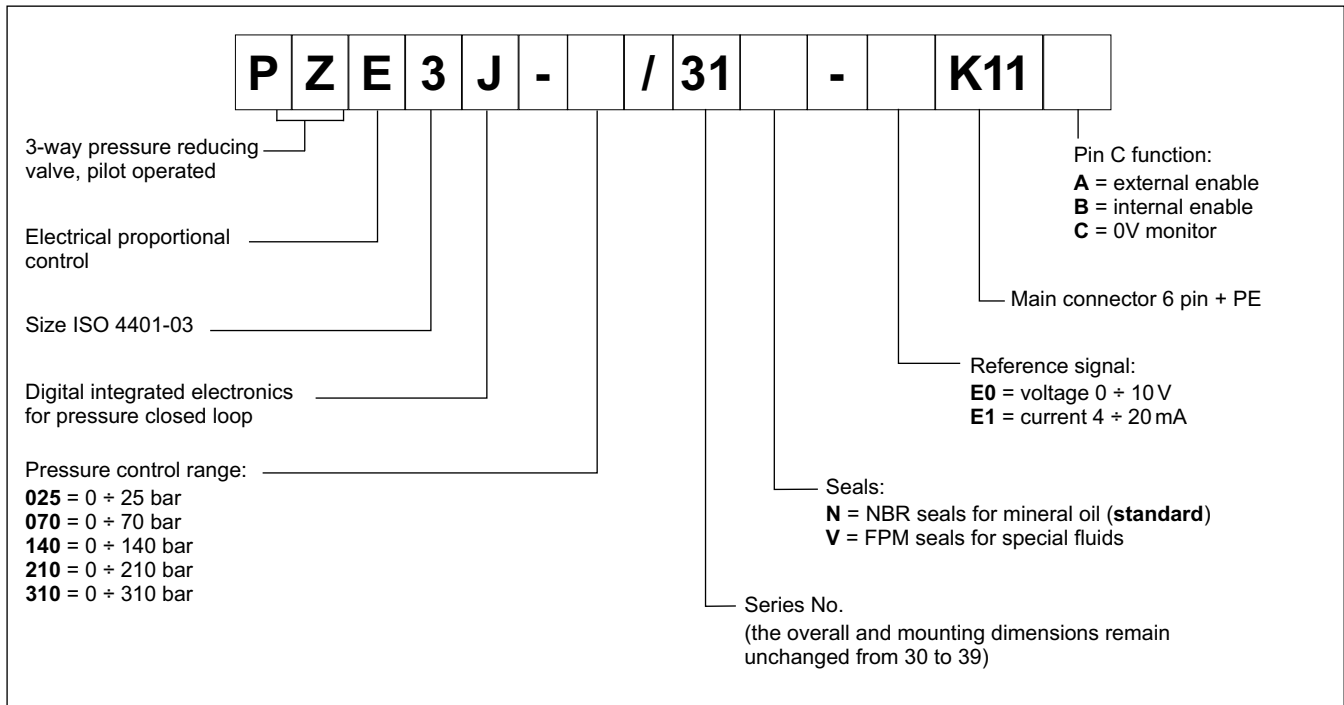


## 2 - ELECTRICAL CHARACTERISTICS

### 2.1 - Electrical on board electronics


Duty cycle		100% (continuous operation)
Protection class according to EN 60529		IP65 / IP67
Supply voltage	V DC	24 (from 19 to 30 VDC), ripple max 3 Vpp
Power consumption	VA	25
Maximum solenoid current	A	1.88
Fuse protection, external		2A time lag
Command signals: voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ri > 11 kOhm) 4 ÷ 20 (Impedance Ri = 58 Ohm)
Monitor signal (pressure at transducer): voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ro > 1 kOhm) 4 ÷ 20 (Impedance Ro = 500 Ohm)
Managed breakdowns		Overload and electronics overheating, cable breakdown, supply voltage failures
Communication		LIN-bus Interface (with the optional kit)
Connection		7 - pin MIL-C-5015-G (DIN-EN 175201-804)
Electromagnetic compatibility (EMC)		According to 2014/30/EU standards (testing accordingly: IEC 61000-6-2, IEC 61000-6-4, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8)

### 2.2 - On-board electronics diagrams


**VERSION A - External Enable**

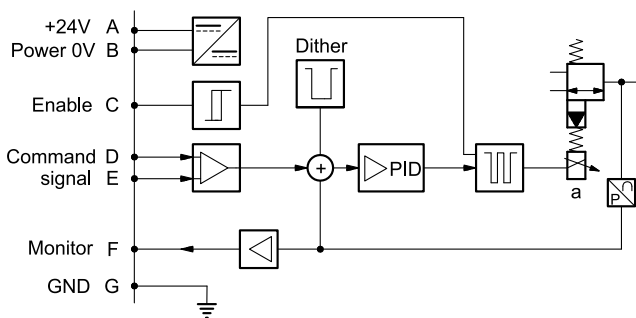

**VERSION B - Internal Enable**


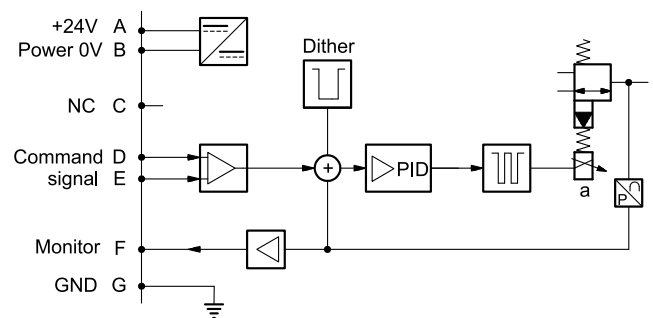


**VERSION C - 0V Monitor**

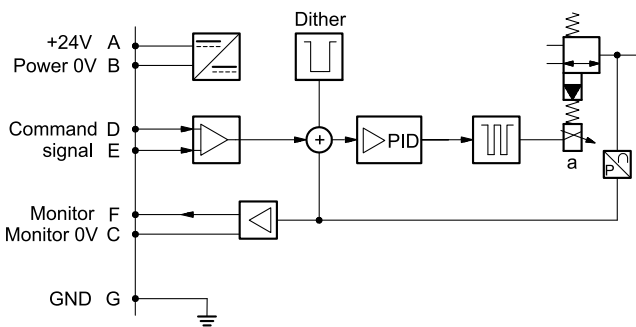

### 3 - VERSIONS WITH VOLTAGE COMMAND (E0)



The reference signal is between 0 + 10V. The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.

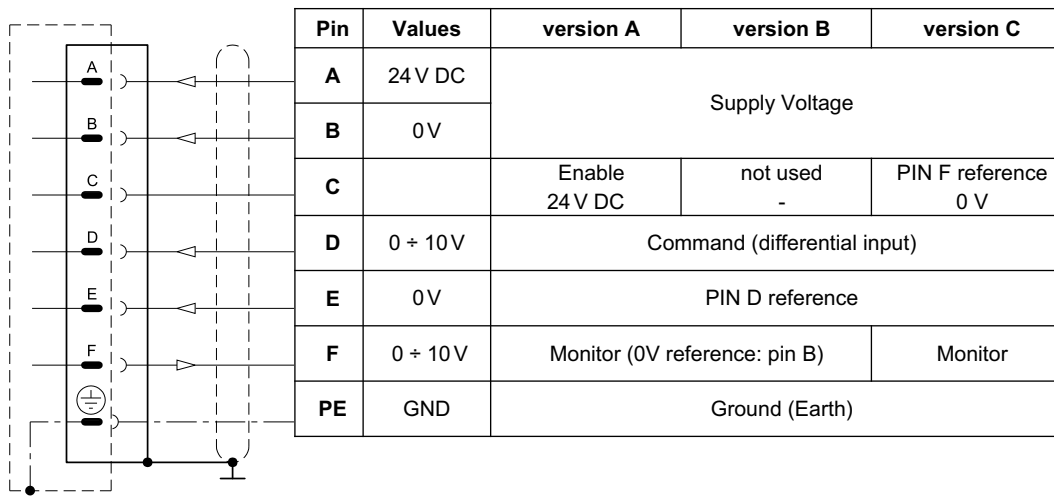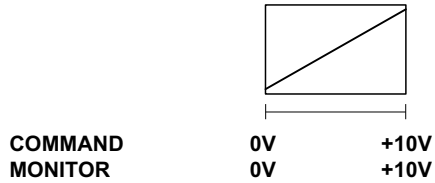

### 4 - VERSIONS WITH CURRENT COMMAND (E1)

The reference signal is supplied in current 4 + 20 mA. If the current for command is lower the card shows a breakdown cable error. To reset the error is sufficient to restore the signal.

The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.

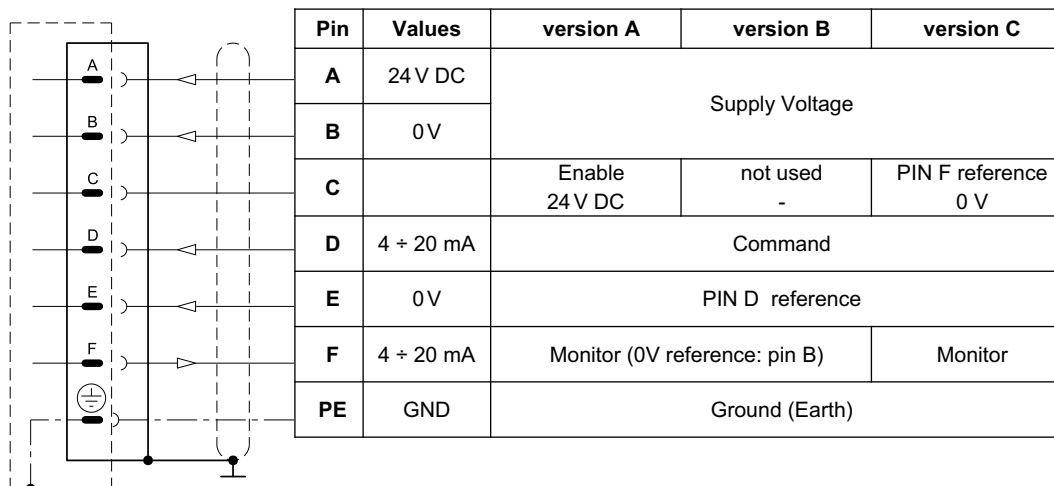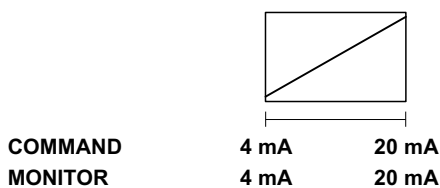


## 5 - CHARACTERISTIC CURVES


(measured with viscosity of 36 cSt at 50°C)

Typical control characteristics, according to the reference signal for available pressure control ranges. Characteristic curves measured without backpressure in T, with linearity and hysteresis compensation set by the onboard electronics.


**PRESSURE CONTROL  $p = f(I)$**

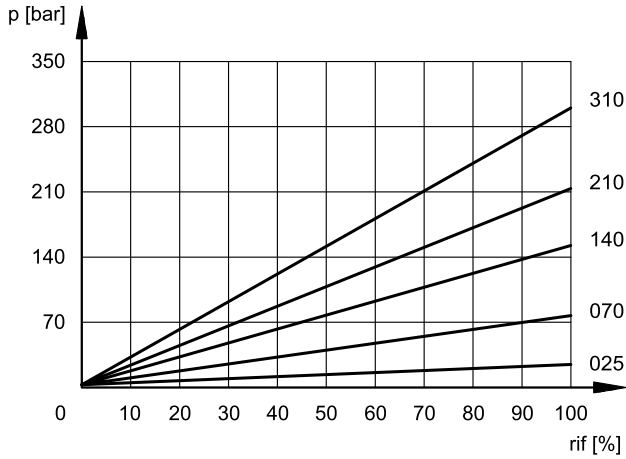

**SET PRESSURE  $p_{max} = f(Q)$**

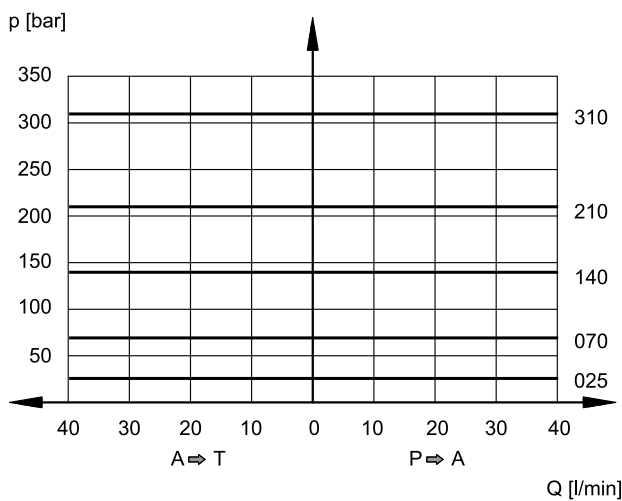

**MIN CONTROLLED PRESSURE  $p_{min} = f(Q)$**

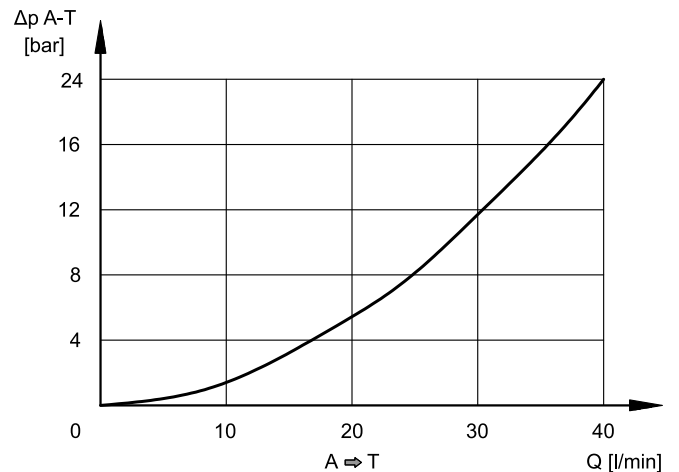


Pressure drops A → T vs. flow, without backpressure in T port and reference signal = 0 %


## 6 - RESPONSE TIMES

(obtained with mineral oil with viscosity of 36 cSt at 50°C)

The response time is affected by both the flow rate and the oil volume in the pipework.

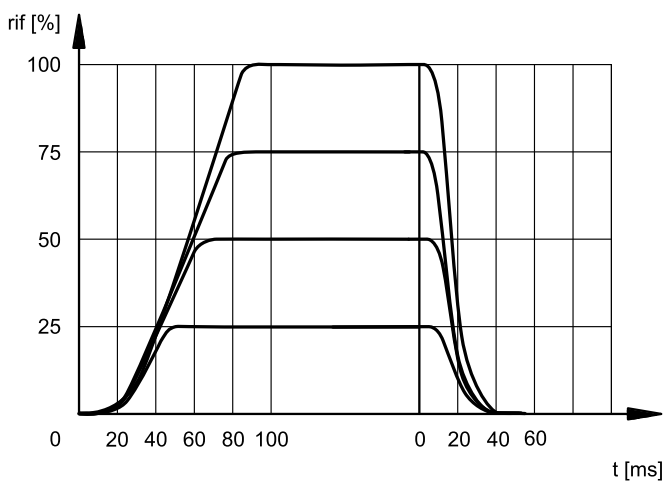

## 7 - OVERALL AND MOUNTING DIMENSIONS

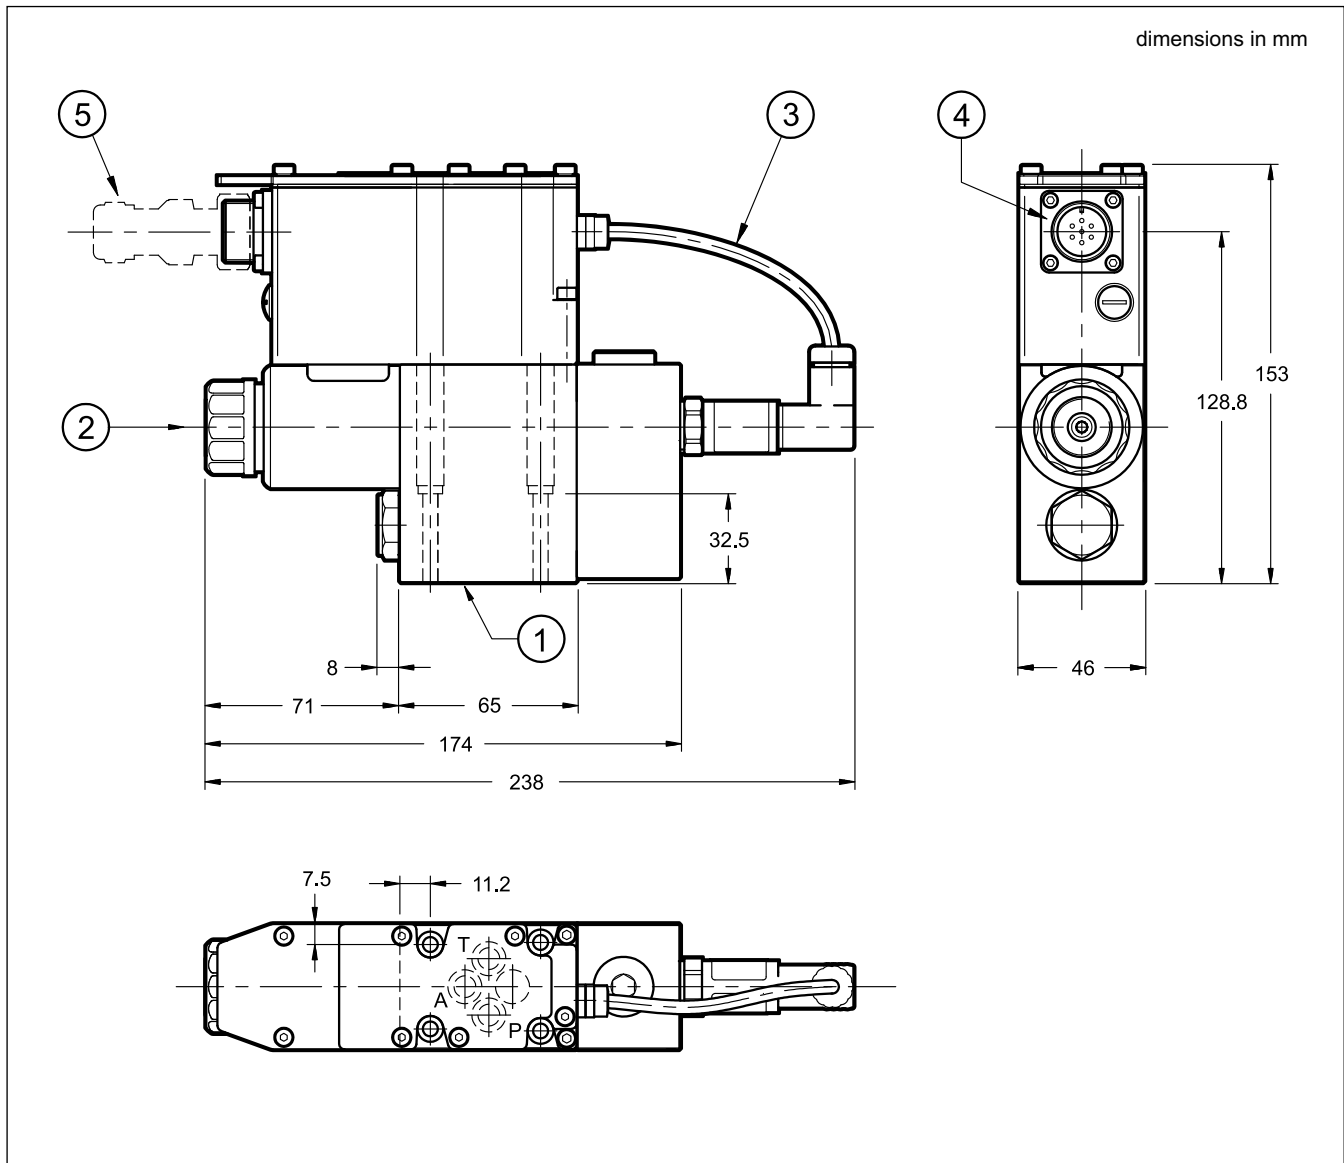

**NOTE:** at the first start up, or after a long period of no use, it is necessary to vent the air through the breather (2) placed at the end of the solenoid tube.

Valve fastening: N. 4 bolts M5x40 - ISO 4762
Tightening torque: 5 Nm (A8.8 screws)
Threads of mounting holes: M5x10

1	Mounting surface with sealing rings: 4 OR type 2037 (9.25 x 1.78) - 90 shore
2	Breather: Allen key 4
3	Cable with connector for pressure transducer
4	Main connection
5	Electrical connector. <b>To be ordered separately.</b> See paragraph. 10

## 8 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

## 9 - INSTALLATION


We recommend to install the valves either in horizontal position, or vertical position with the solenoid downward. If the valve is installed in vertical position and with the solenoid upward, you must consider possible variations of the minimum controlled pressure, if compared to what is indicated in paragraph 5.

Ensure that there is no air in the hydraulic circuit. In particular applications, can be necessary to vent the air entrapped in the solenoid tube, by using the appropriate drain screw in the solenoid tube.

Ensure the solenoid tube is always filled with oil. At the end of the operation, make sure of having correctly replaced the drain screw.

**Connect the valve T port directly to the tank. Add any backpressure value detected in the T line to the controlled pressure value. Maximum admissible backpressure in the T line, under operational conditions, is 2 bar.**

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed, fluid can easily leak between the valve and support surface.

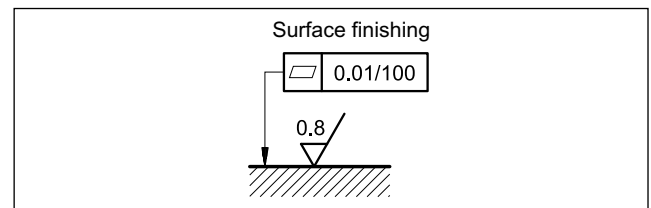

## 10 - ACCESSORIES

(to be ordered separately)

### 10.1 Mating connector

These valves have a plug for 7-pin mating connector, that is placed on the box of the integral motion control.


So as to avoid electromagnetic troubles and comply with the electromagnetic compatibility regulation EMC, it is recommended the use of a metal connector.



If a plastic connector is used, make sure that the protection characteristics IP and EMC of the valve are guaranteed.

Duplomatic offers a metal cable connector type MIL-C-5015-G (EN 175201-804).

name: **EX7S/L/10** code **3890000003**

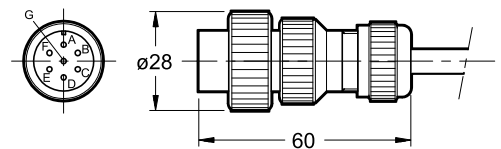

### 10.2 - Connection cables size

Power supply:

- up to 20 m cable length : 1,0 mm<sup>2</sup>
- up to 40 m cable length : 1,5 mm<sup>2</sup>

Signal: 0,50 mm<sup>2</sup>

A suitable cable would have 7 isolated conductors, a separate screen for the signal wires and an overall screen.

### 10.3 - Kit for start-up LINPC-USB

Device for service start-up and diagnostic, see catalogue 89850.

## 11 - SUBPLATES

(see catalogue 51 000)

PMMD-AI3G with ports on rear
PMMD-AL3G with side ports
Ports dimensions P, T, A, B: 3/8" BSP thread



**PZE3J**  
SERIES 31



**DIPLOMATIC MS S.p.A.**

via M. Re Depaolini 24 • 20015 PARABIAGO (MI) • ITALY  
tel. +39 0331.895.111 • [www.diplomatic.com](http://www.diplomatic.com) • e-mail: [sales.exp@diplomatic.com](mailto:sales.exp@diplomatic.com)